


2

HEAD PROTECTION

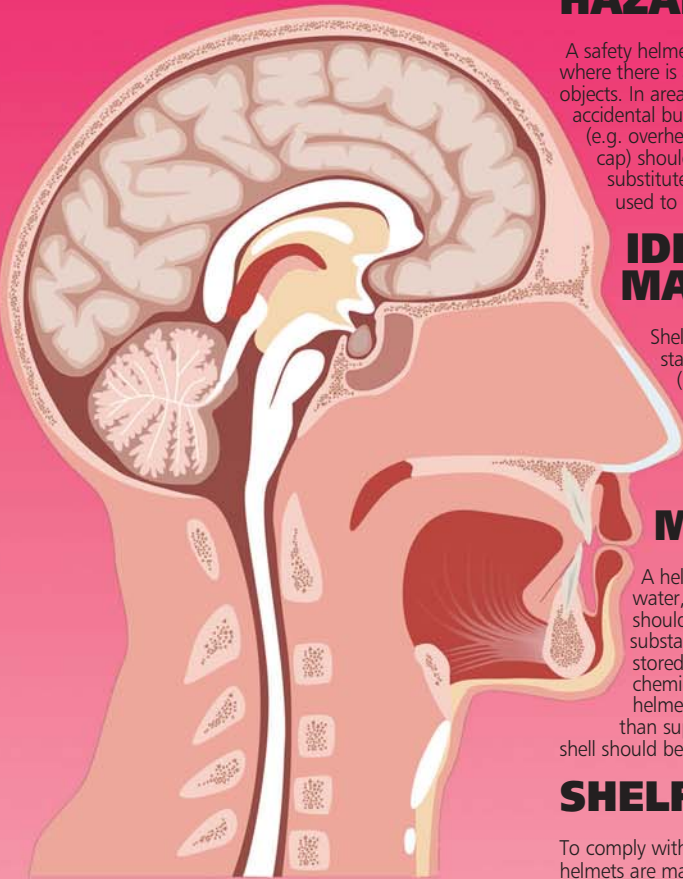

IDENTIFYING HAZARDS

A safety helmet is required in almost every industry where there is a risk of being injured by falling objects. In areas of restricted head space where accidental bumping of the head could be involved (e.g. overhead piping) a scalp protector (bump cap) should be considered. Bump caps are not a substitute for safety helmets and must not be used to protect the head from falling objects.

IDENTIFYING MATERIALS

Shells are primarily made using UV stabilised high density polyethylene (HDPE) or ABS (Acrylonitrile Butadiene Styrene). Harnesses are made using low density polyethylene or terylene webbing.

CARE AND MAINTENANCE

A helmet may be cleaned with soap and water, drying with a soft cloth. A helmet should not be cleaned with abrasive substances or solvents and must not be stored in direct sunlight or in contact with chemicals. The wearer should inspect a helmet regularly. Any helmet showing more than superficial abrasions or scuffing to the shell should be replaced.


SHELF LIFE

To comply with European Standards, all helmets are marked with the quarter or month and year of manufacture. If helmets are stored in boxes in which they were supplied and do not experience environmental extremes, the shelf life of a helmet is not limited. However, it is not recommended that a helmet should be in use five years after date of manufacture.

SO WHAT ARE THE DIFFERENCES?

A helmet is not just a helmet. They have many different features providing specific user benefits, such as:

- **Weight:** Some helmets are lighter than others. A lightweight helmet provides comfort during prolonged periods of use
- **Cradle:** A helmet can have either a basic polyethylene cradle or a more comfortable Terylene webbing cradle
- **Sweatband:** A helmet can have either none, a standard or a high absorbent sweatband for improved comfort during use
- **Ventilation:** Some helmets are ventilated, providing cooling airflow during use
- **Badging:** Some helmet designs allow for a larger front badging area, for an enhanced corporate image
- **Peaks:** Peak lengths can vary – a reduced peak is available for improved upward visibility



SAFETY HELMET IDENTITY STICKER



1


Attach ID sticker to helmet



Pull tag to access information



Worker information revealed

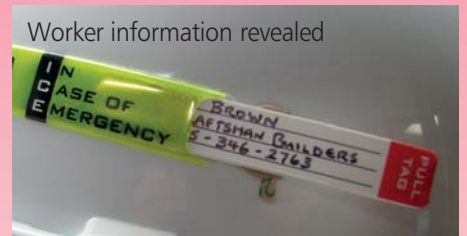

1 HELMET WORKER IDENTITY ID STICKER

In Case of Emergency (ICE) stickers for accident victims give the on-site medical team member or attending ambulance staff instant access to the victim's potential lifesaving information and enables emergency contacts to be quickly notified of the situation 24/7. A cost-effective solution to strengthen your existing on-site safety procedures and worker information records. An essential safety product for work sites with large worker numbers and frequent staff rotation/turnover. Made from 3M™ reflective material, 100% waterproof and fully secure with security flap to protect the worker's information. Will not weaken nor damage safety helmets in any way.

Code: 343284

Each £2.95

EUROPEAN STANDARDS

EN 397 specifies physical and performance requirements of industrial safety helmets. Certain tests are mandatory if the product is to receive EN 397 approval.

These cover:

- Shock absorption
- Resistance to penetration
- Flame resistance
- Chinstrap anchorage

A manufacturer can choose to submit his products to additional optional tests. Such tests could lead to one or more of these markings appearing on a helmet.

-20°/-30°C The helmet will provide some protection when worn in an environment at or above this temperature. **-40°C** ultra low temperature (outside of EN 397)

440V a.c. The helmet will protect against short term, accidental contact with live electrical conductors up to this voltage

LD The helmet will provide some protection from lateral compressive loads

MM Molten Metal splash test

EN 50365 Electrically insulating helmets for use on low voltage installations

EN 812 is the standard for Industrial Bump Caps, which are intended to provide protection against bumps caused by walking into hazardous projections. A Bump Cap does not provide protection against falling or thrown objects and should not be used where a safety helmet is required